

SHIBAURA

SUBCOMPACT TRACTOR

SX21

SX24


Featuring
Super Durability
& Functionality



SHIBAURA
TOKYO, JAPAN

SX24 (with the Optional 60 inch Side Discharge
Mid-Mounted Mower Deck)

SX21 & 24—the Right Combination of Strength, Power, Versatility, Agility, and Comfort

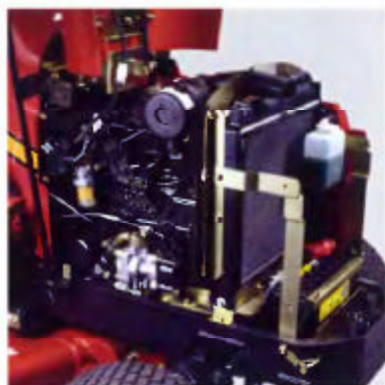

Great Accessibility for Easy Maintenance



Operator-Friendly Instrument Panel, Levers, and Pedals



Category I Three Point Hitch & Fixed Drawbar

SPECIFICATIONS (**)

TRACTOR MODEL		SX21	SX24
Drive			4WD
Transmission Type			HST
ENGINE (DIESEL)			
Model	hp(kW)	S753	S773
Engine Gross Power (*)		21(15.7)	24(17.9)
No. of Cylinders		3	
Total Displacement	cc	954	1005
Rated Speed	rpm	3000	
Battery	V-A	12-40	
Alternator	A	40	
Fuel Tank Capacity	litre	29.5	
PTO - REAR : Standard, MID : Standard			
Rear PTO (at rated E. 3000rpm)		540	
Mid PTO (at rated E. 3000rpm)		2185	
PTO Selector Lever		3-Mode (Mid/Mid & Rear/Rear)	
HYDRAULIC			
Position Control		Standard	
Max. Lifting Capacity (@24 behind LP) (*)	kg	318	
Draft Control		N/A	
3-Point Hitch - Category-1 & Fixed Drawbar		Standard	
TRAVELING SYSTEM			
Steering		Power Steering	
Brake		Wet Disk	
STANDARD TIRE SIZE			
Bar Type		(F)18×8.50-8 (R)26×12.00-12	
Turf Type (Option)		(F)18×8.5-8 (R)26×12.00-12	
Agricultural Type (Option)		(F)4.00-9 (R)7-14	
TRAVELING SPEED			
Forward (*)	km/h	8.1-16.6	
Reverse (*)	km/h	5.4-11.1	
DIMENSIONS			
Overall Length (W/3P)	mm	2493	
Overall Width (Bar tires)	mm	1175	
Overall Height (W/ROPS) (Bar tires)	mm	2288	
Wheelbase (Bar tires)	mm	1400	
Min. ground clearance (Bar tires)	mm	230	
Tread Setting - Front/Rear (Bar tires)	mm	940/870	
Weight (W/ROPS) (Bar tires)	kg	694	696

(*) Manufacturer's estimation

(**) The specifications are subject to change without notice

SHIBAURA

Ishikawajima-Shibaura Machinery Co., Ltd.

Head Office : Harmony-Tower 11F

1-32-2 Hon-cho, Nakano-ku, Tokyo, Japan

Tel.03-5334-7902 Fax.03-5334-4465

Factories : MATSUMOTO, OKAYAMA, ASHIKAGA

Catalog No.2636 Printed in Japan